

List of pages in this Trip Kit

- Trip Kit Index
- Airport Information For OPPI
- Terminal Charts For OPPI
- Revision Letter For Cycle 10-2025
- Change Notices
- Notebook

General Information

Location: PASNI PAK
ICAO/IATA: OPPI / PSI
Lat/Long: N25° 17.4', E063° 20.7'
Elevation: 33 ft

Airport Use: Public
Daylight Savings: Not Observed
UTC Conversion: -5:00 = UTC
Magnetic Variation: 1.0° E

Fuel Types: Jet A-1
Customs: Yes
Airport Type: IFR
Landing Fee: Yes
Control Tower: Yes
Jet Start Unit: No
LLWS Alert: No
Beacon: No

Sunrise: 0059 Z
Sunset: 1428 Z

Runway Information

Runway: 06
Length x Width: 8999 ft x 151 ft
Surface Type: bitu
TDZ-Elev: 32 ft
Lighting: Edge

Runway: 24
Length x Width: 8999 ft x 151 ft
Surface Type: bitu
TDZ-Elev: 33 ft
Lighting: Edge, ALS
Stopway: 751 ft

Communication Information

Pasni Tower: 124.300
Pasni Ramp/Taxi: 121.800

OPPI/PSI




PASNI, PAKISTAN

Apt Elev **33**
N25 17.4 E063 20.7

30 JUL 21 (10-9).Eff.12.Aug.

PASNI

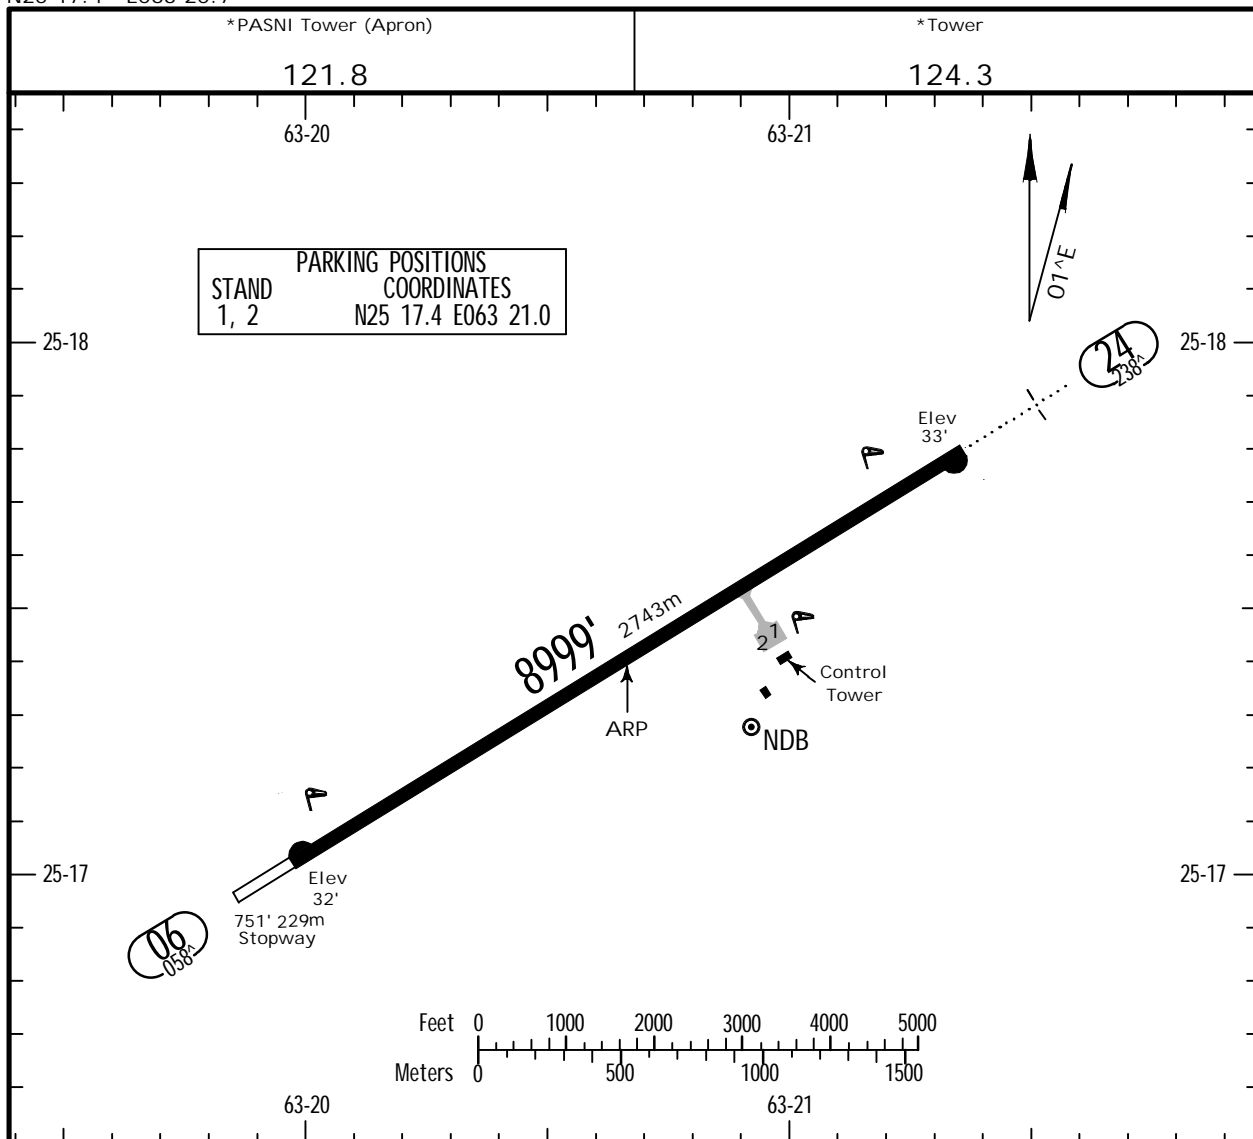

| ADDITIONAL RUNWAY INFORMATION | | | | | | |
|-------------------------------|-----------|-------|--------------------|--|----------------|-------------|
| RWY | | | | | USABLE LENGTHS | |
| | | | | | LANDING | BEYOND |
| | | | | | Threshold | Glide Slope |
| | | | | | | TAKE-OFF |
| | | | | | | WIDTH |
| 06 | HIRL(60m) | | | | | |
| 24 | HIRL(60m) | HIALS | PAPI-L(angle 3.0^) | | | 151' 46m |

| | | | | |
|-----------|-------|------------|------------------|-------|
| Std. | | | | |
| TAKE-OFF | | | | |
| RL & RCLM | RL | RL or RCLM | Adequate Vis Ref | |
| DAY | NIGHT | DAY | DAY | NIGHT |
| R300m | | R400m | R/V500m | NA |

OPPI/PSI
PASNI




30 JUL 21

(16-1)

.Eff.12.Aug.

CAT A & B

PASNI, PAKISTAN
NDB Rwy 06

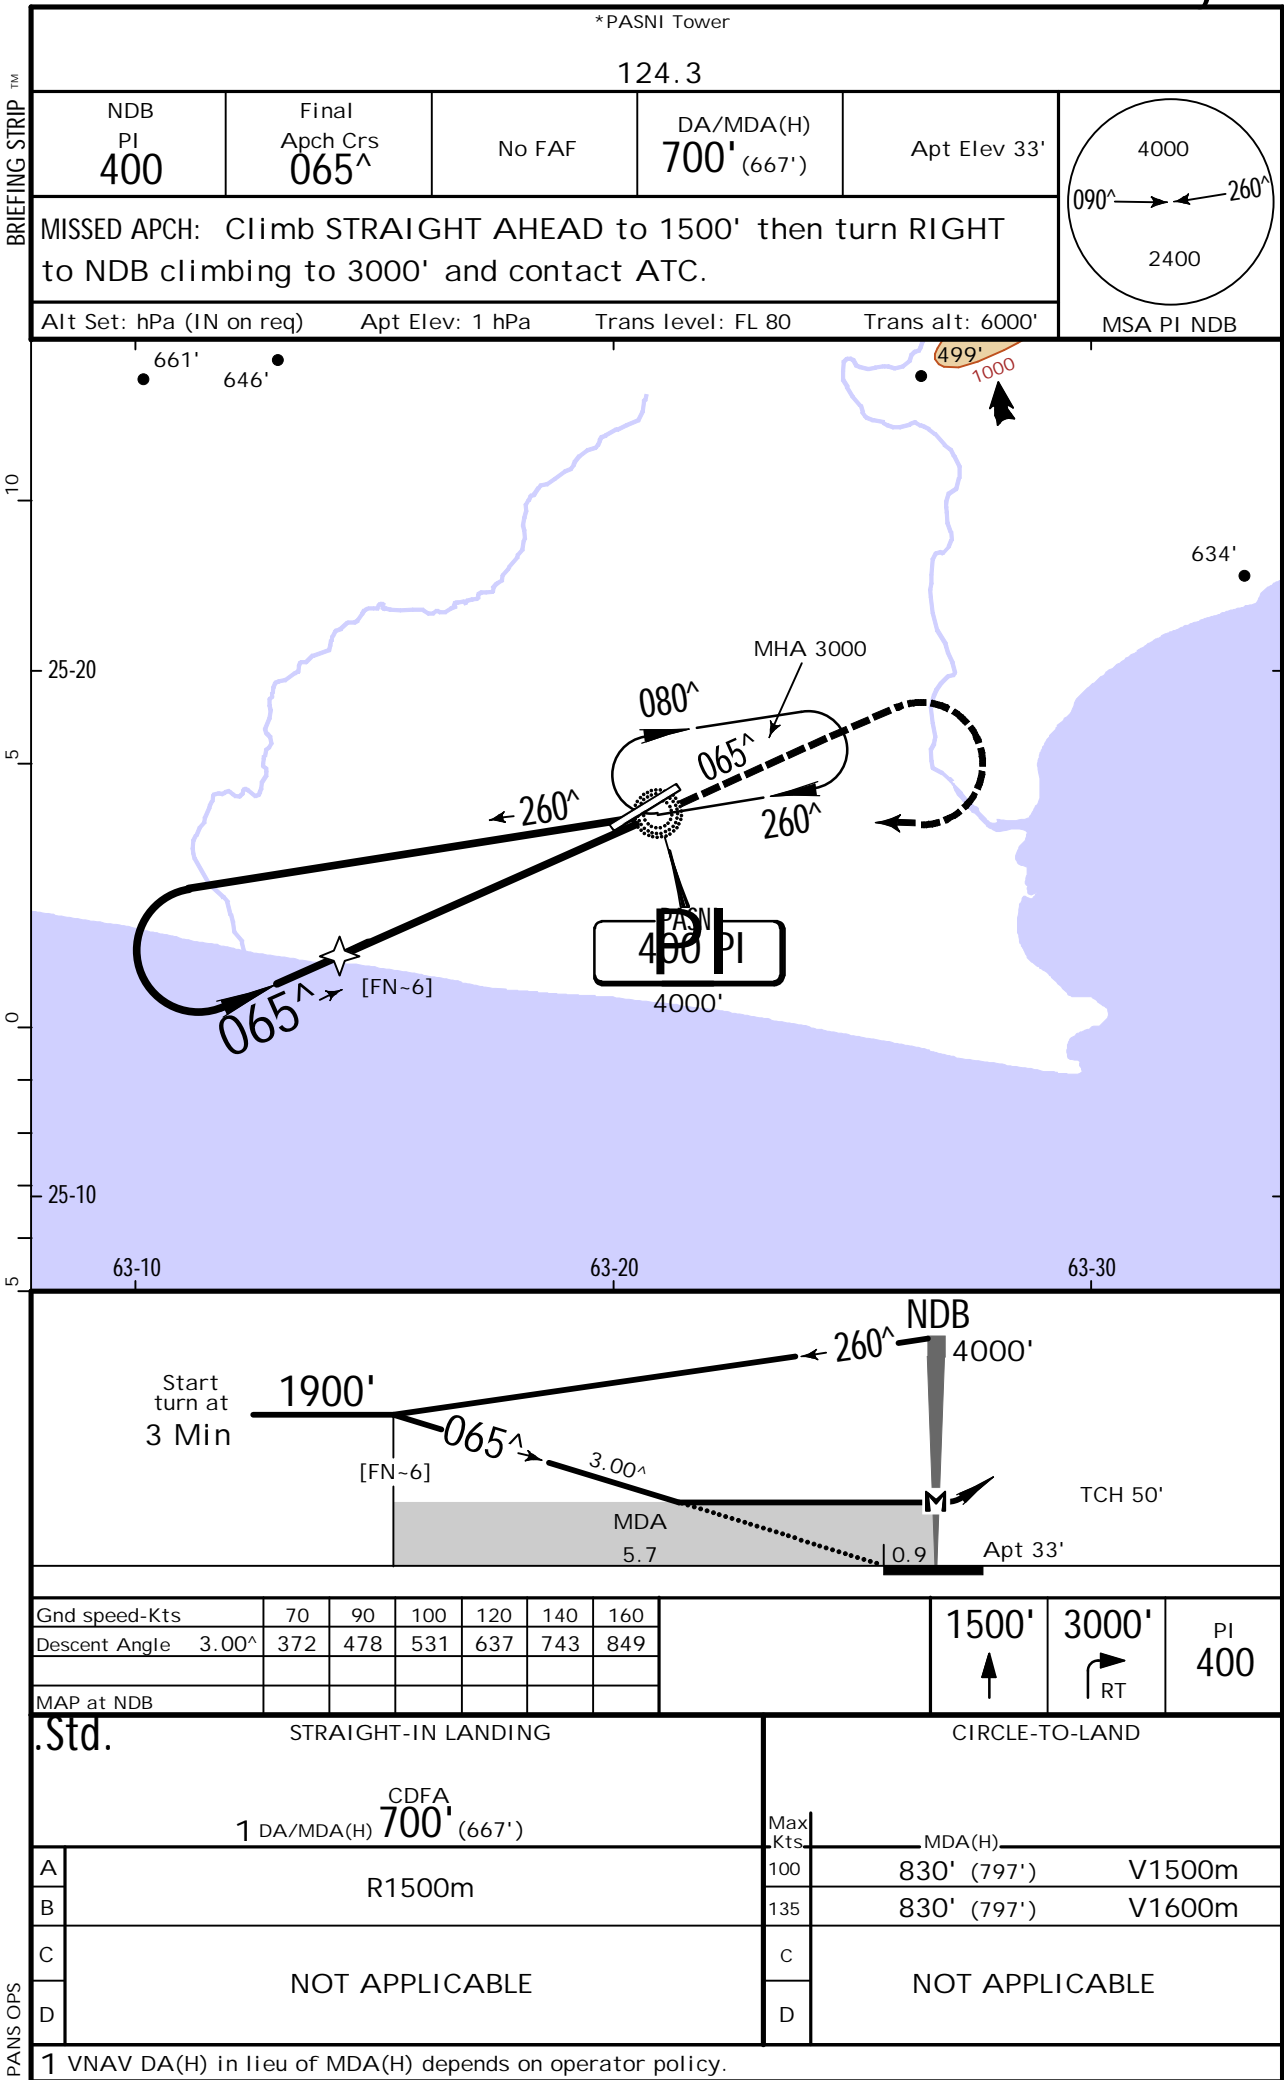

OPPI/PSI
PASNI

JEPPESSEN


30 JUL 21

(16-2)

.Eff.12.Aug.

CAT A & B

PASNI, PAKISTAN
NDB Rwy 24

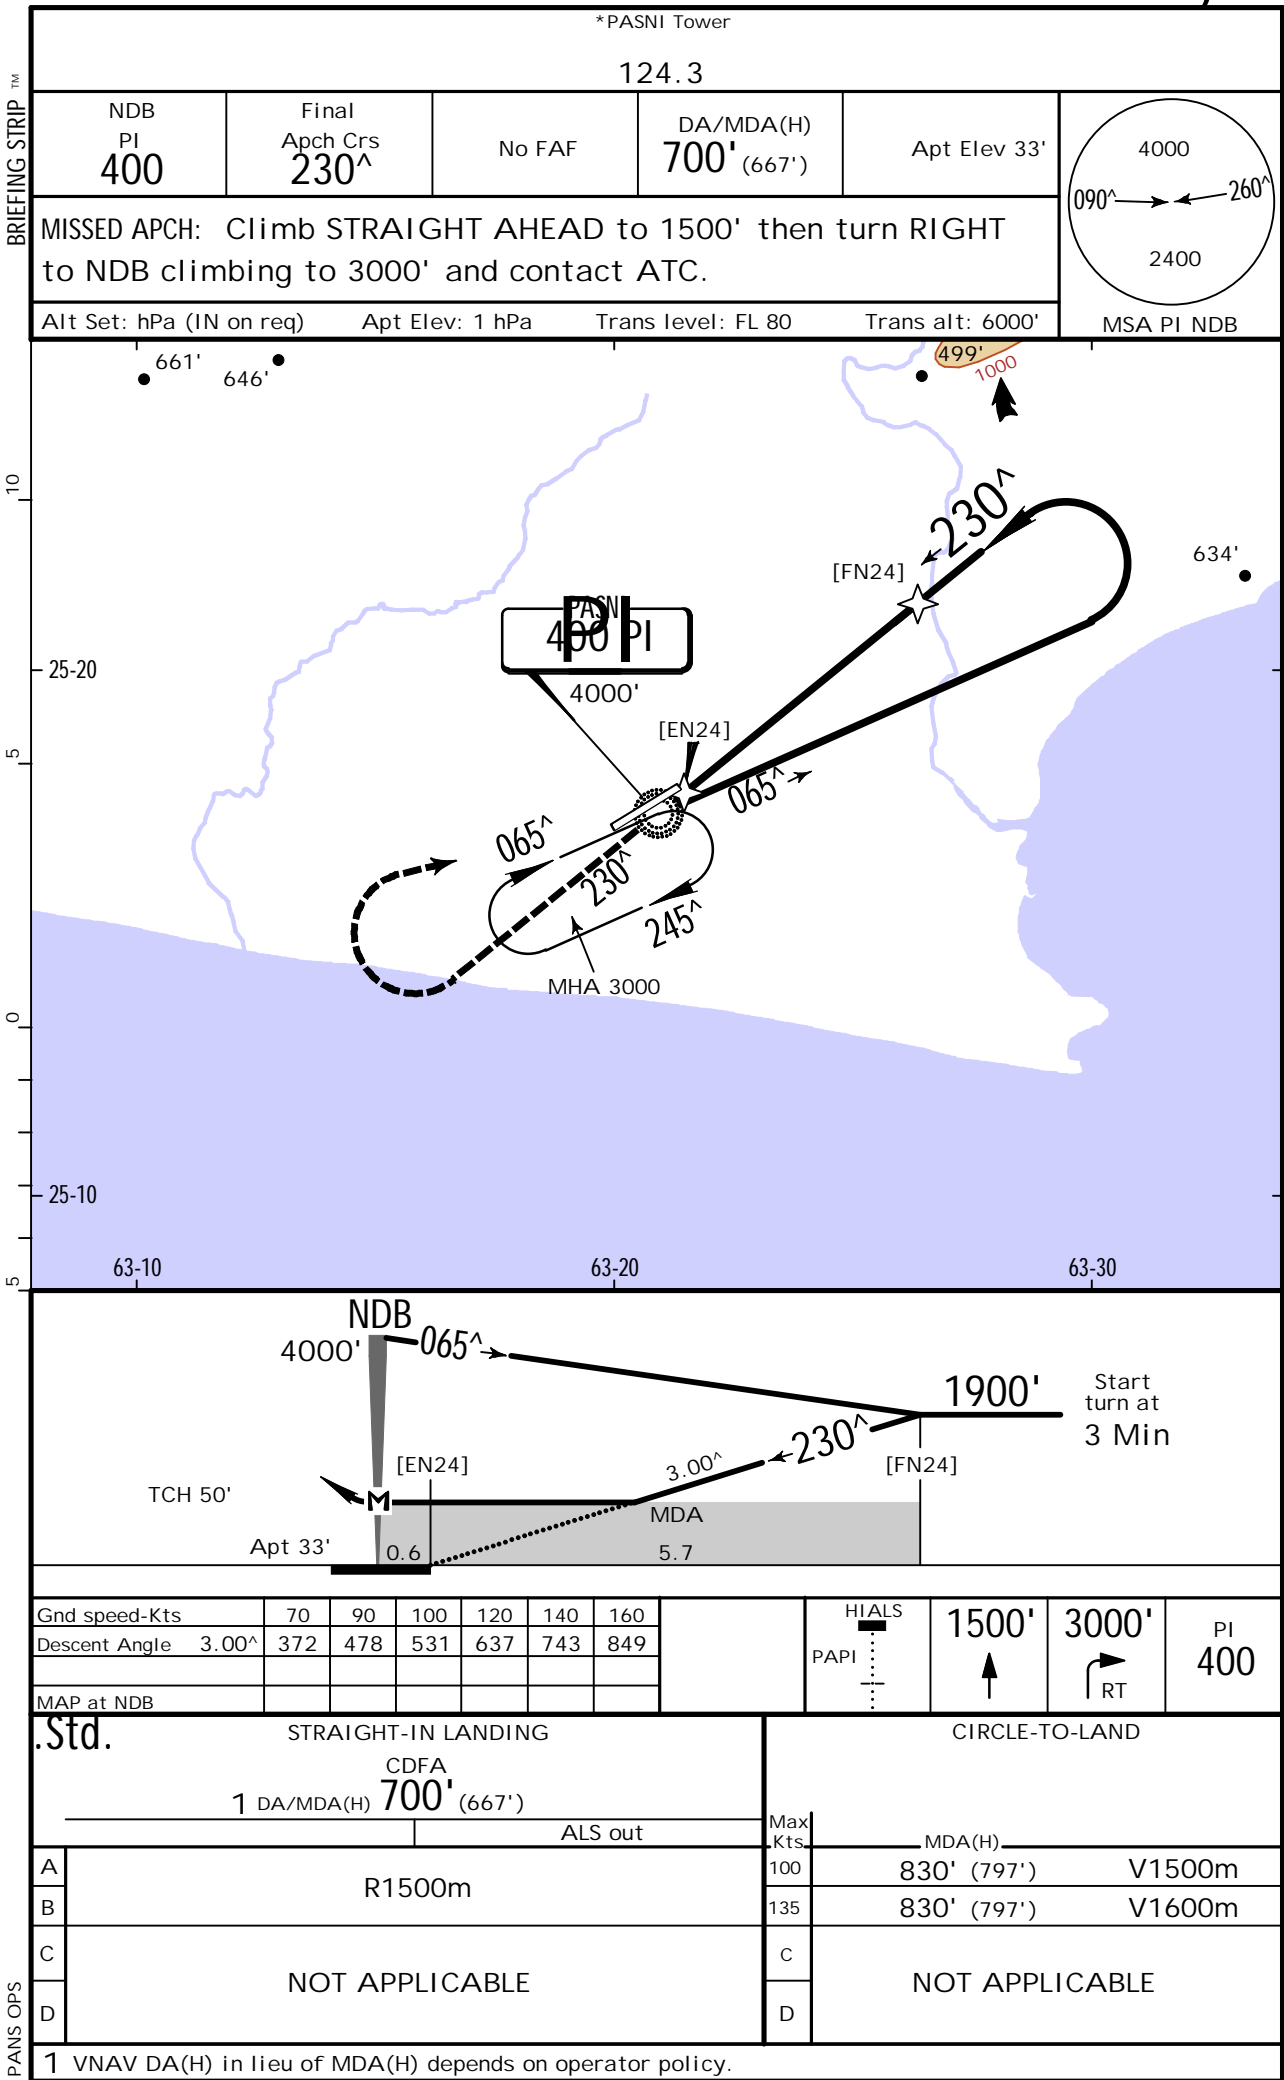

PASNI, (PASNI - OPPI)

TERMINAL CHART CHANGE NOTICES

Chart Change Notices for Airport OPPI

Type: Terminal
Effectivity: Temporary
Begin Date: Immediately
End Date: 20250630

Stand number 2 not available (based on SUP 42-24).